


## Filter media PPI

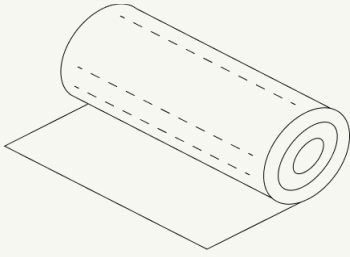

Filtration material is produced with a pore volume of 10-30 PPI. It has 97% open pores. It features high resistance to humidity and extremely high fluid collection capacity. Filter foam can be used in air filtration, aquariums, swimming pools.

## Standard dimensions

⊘ 1,5 x 2 m

Please ask for other desired dimensions.



## TECHNICAL INFO

Type	PU polyurethane foam
Nominal thickness	4-500 mm
Density	25 kg/m <sup>3</sup> PN-EN-ISO 845
Tensile strenght	min. 60-110 kPA PN-EN-ISO 1798
Elongation at break	60-90% PN-EN-ISO 1798
Air flow rate	Very high
Temperature resistance	-40/ +140°C
Storage	The products should be stored in dry rooms (humidity up to 70%) at temperatures from +5°C to +30°C.